

# SR105

## General Purpose Storage Server Chassis



### Specification

<b>M/B Form Factor</b>	• Extended ATX (12" x 13"), CEB(12" x 10.5"), ATX(12" x 9")
<b>Dimension (D×W×H)</b>	• 533 mm × 198 mm × 425 mm • 20.9" × 7.8" × 16.7" (Bezel not included)
<b>Drive Bay</b>	• External : 5.25" x 3 (Optional 5.25" to 3.5" bracket) • HDD Tray : 3.5" x 4 (Fixed or H/S) or 2.5" x 6 (H/S)
<b>PSU</b>	• Form Factor : PS/2 EPS12V, 1 + 1 Mini-Redundant • Watt : 600 W or above
<b>Cooling Fan</b>	• Front : 1 x 92 mm (Optional), 1 x 80 mm or 1 x 92 mm (For HDD) • Rear : 1 x 120 mm PWM
<b>Slot Opening</b>	• 7 (5 x full length + 2 x half length)
<b>Net Weight (Chassis only)</b>	• 9 Kg
<b>Gross Weight (w/Packing)</b>	• 11 Kg
<b>Backplane</b>	• SATAII/SAS, 3.5"/2.5" Mini-SAS
<b>Container Info.</b>	• Single Packing (SR10564,65,66,68/10563,67,69) 20' : 297/311 • 40' : 621/636 • 40'H : 736/752 • Bulk Packing + Pallet (SR10564,65,66,68/10563,67,69) 20' : 320/348 • 40' : 720 • 40'H : 900/X

### Features & Benefits

- For general purpose server platform
- Utilized 5.25" bays with Chenbro storage kits
- Flexible configuration
- Tool-less design for easy installation
- Thermal certification of Intel dual core/Quad core CEB compliant
- Optional variety bezels for server & workstation
- Rackable solution by optional kit



3 x 5.25" bays for ODD or storage kits



Removable HDD cage for hot-swap or non-hot-swap tray



Screwless card retainer



CPU mounting kits for 12" x 10.5" CEB M/B




1 x rear 120 mm PWM fan & air duct for memory cooling

Rear View



Inside View

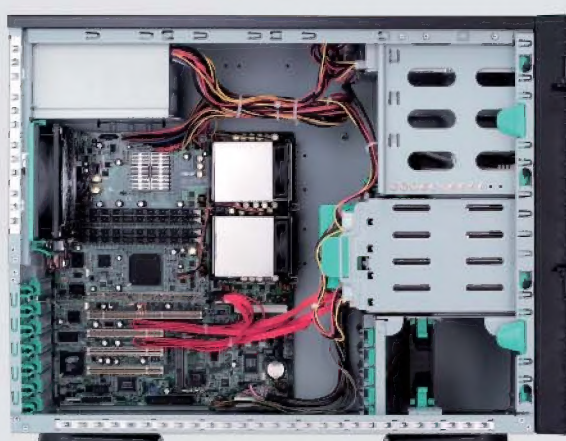

Front View

